



Cirrus SR22 Exterior Placard Kit

Page 1 of 2

NOTE: Modifications and changes to accomodate your specific aircraft will be made at NO EXTRA CHARGE.
Partial kits available upon request.

IF YOU HAVE ANY QUESTIONS PLEASE CALL!

Phone: 1-800-336-9633

www.aerographics.com

Fax: 1-970-461-2065

WARNING!
ROCKET FOR PARACHUTE DEPLOYMENT INSIDE
STAY CLEAR WHEN AIRPLANE IS OCCUPIED

WARNING!
ROCKET FOR PARACHUTE DEPLOYMENT INSIDE
STAY CLEAR WHEN AIRPLANE IS OCCUPIED

CAUTION:
INSTALLATION OF INCORRECT
LENGTH SCREW IN ACCESS
PANEL MAY CAUSE
INTERFERENCE WITH PITCH
CONTROL SYSTEM.

CAUTION:
INSTALLATION OF INCORRECT
LENGTH SCREW IN ACCESS
PANEL MAY CAUSE
INTERFERENCE WITH PITCH
CONTROL SYSTEM.

SCREWS MUST BE INSTALLED
FOR ENGINE OPERATION.

SCREWS MUST BE INSTALLED
FOR ENGINE OPERATION.

SECOND BATTERY
LOCATED AFT OF
BAGGAGE COMPARTMENT

RESCUE: FRACTURE AND REMOVE WINDOW
RESCUE: FRACTURE AND REMOVE WINDOW

NO PUSH
NO PUSH
NO PUSH
NO PUSH
NO STEP
NO STEP
NO STEP

NO PUSH
NO PUSH
NO STEP
NO STEP
NO STEP
NO STEP
NO STEP




CAUTION:
INSTALLATION OF INCORRECT
LENGTH SCREW IN ACCESS
PANEL MAY CAUSE
INTERFERENCE WITH PITCH
CONTROL SYSTEM.

CAUTION:
INSTALLATION OF INCORRECT
LENGTH SCREW IN ACCESS
PANEL MAY CAUSE
INTERFERENCE WITH PITCH
CONTROL SYSTEM.

EXTERNAL
POWER
28 V DC

EXTERNAL
POWER
28 V DC

PUSH
TO
OPEN
PUSH
TO
OPEN
PUSH
TO
OPEN
PUSH
TO
OPEN

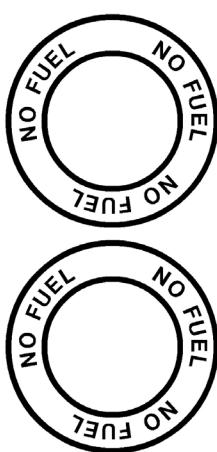



TKS ICE PROTECTION FLUID
USE ONLY AL-5 (DTD-406B) FLUID
4.0 US GALLONS (15.1 LITERS)
TOTAL USABLE CAPACITY

TKS FLUID DRAIN
TKS FLUID DRAIN

DE-ICE DRAIN DE-ICE DRAIN

DE-ICING FLUID
REFER TO AFM FOR APPROVED
DE-ICING FLUIDS

DE-ICING FLUID
REFER TO AFM FOR APPROVED
DE-ICING FLUIDS

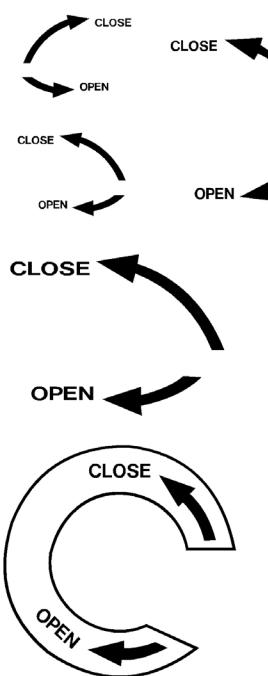



Cirrus SR22 Exterior Placard Kit Page 2 of 2

NOTE: Modifications and changes to accomodate your specific aircraft will be made at NO EXTRA CHARGE.
Partial kits available upon request.

IF YOU HAVE ANY QUESTIONS PLEASE CALL!






Phone: 1-800-336-9633 www.aerographics.com Fax: 1-970-461-2065

AVGAS MIN GRADE 100LL OR 100
40.5 U.S. GALS. (153 LITERS) TOTAL USABLE CAP
23.5 U.S. GALS. (89 LITERS) USABLE TO TAB

ENGINE OIL GRADE
ABOVE 40°F SAE 50, 20W50 OR 20W60
BELOW 40°F SAE 30 OR 10W30, 15W50, OR 20W50
REFER TO AFM FOR APPROVED OILS

AVGAS MIN GRADE 100LL OR 100
40.5 U.S. GALS. (153 LITERS) TOTAL USABLE CAP
23.5 U.S. GALS. (89 LITERS) USABLE TO TAB

ENGINE OIL GRADE
ABOVE 40°F (4°C) SAE 50, 20W50 OR 20W60
BELOW 40°F (4°C) SAE 30 OR 10W30, 15W50, OR 20W50
REFER TO AFM FOR APPROVED OILS

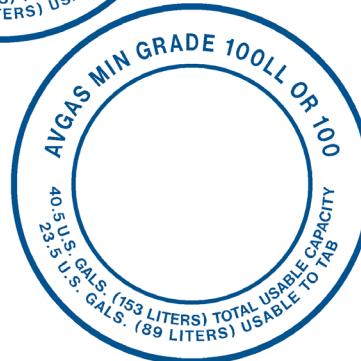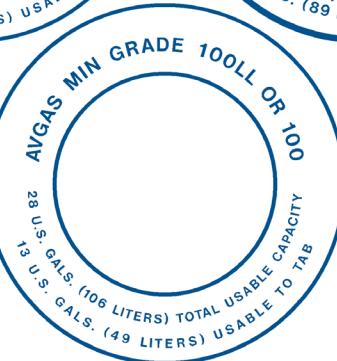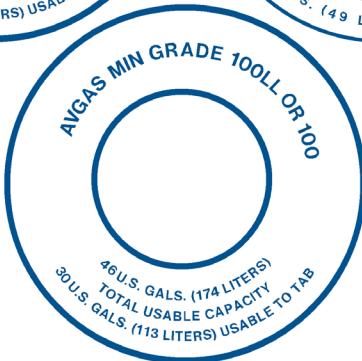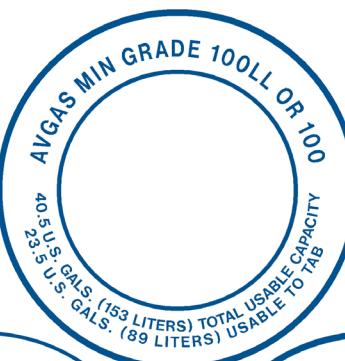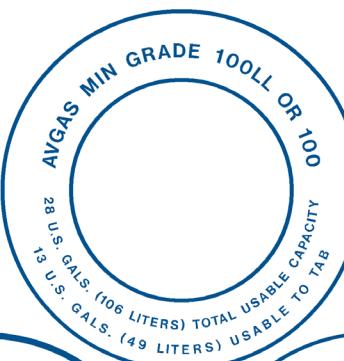

RESCUE: FRACTURE AND REMOVE WINDOW

RESCUE: FRACTURE AND REMOVE WINDOW

